

Flexible energy storage devices for wearable bioelectronics

Xiaohao Ma^{1,2}, Zhengfan Jiang¹, and Yuanjing Lin^{1,2,†}

¹School of Microelectronics, Southern University of Science and Technology, Shenzhen 518055, China

²Engineering Research Center of Integrated Circuits for Next-Generation Communications, Ministry of Education, Southern University of Science and Technology, Shenzhen 518055, China

Abstract: With the growing market of wearable devices for smart sensing and personalized healthcare applications, energy storage devices that ensure stable power supply and can be constructed in flexible platforms have attracted tremendous research interests. A variety of active materials and fabrication strategies of flexible energy storage devices have been intensively studied in recent years, especially for integrated self-powered systems and biosensing. A series of materials and applications for flexible energy storage devices have been studied in recent years. In this review, the commonly adopted fabrication methods of flexible energy storage devices are introduced. Besides, recent advances in integrating these energy devices into flexible self-powered systems are presented. Furthermore, the applications of flexible energy storage devices for biosensing are summarized. Finally, the prospects and challenges of the self-powered sensing system for wearable electronics are discussed.

Key words: flexible electronics; energy storage devices; self-powered systems; wearable bioelectronics

Citation: X H Ma, Z F Jiang, and Y J Lin, Flexible energy storage devices for wearable bioelectronics[J]. *J. Semicond.*, 2021, 42(10), 101602. <http://doi.org/10.1088/1674-4926/42/10/101602>

1. Introduction

The explosive development of the internet of things (IoT) has promoted the progress of portable electronic products. Smartphones, notebook computers, and electronic watches are expected to be continuously revolutionized with desirable form factors including miniaturization, flexibility, and lightweight. Meanwhile, with the increasing demand for personalized healthcare and remote diagnostics, wearable bioelectronics such as smart wristbands and intelligent glasses have come into vogue. These devices are connected to the internet and combined with various software applications to enable users to perceive and monitor their health status and surroundings. Research efforts on bioelectronics have been intensively devoted to the field of bio-medicine, IoTs and health monitoring with the rapid progression of electronic technology^[1–3].

However, one of the challenges lies in the novel flexible energy storage devices, without which the smooth functionalization of various flexible electronics cannot be guaranteed. Conventional energy storage devices are rigid and robust. When bending and folding, it is easy to cause cracks on collectors, affect electrochemical performance, and even lead to electrical short-circuit, resulting in serious safety problems. Therefore, flexible energy storage devices that can withstand mechanical deformation and retain their electrochemical properties have become a research hotspot. Impressive progress has been achieved in developing energy storage devices in a variety of flexible formats with research efforts in material engineering, device structural design, and system integration^[4–7]. The practical requirements of wearable electronics put for-

ward the demands on self-powered integrated systems, which convert clean energy into electricity and support system power supply without external charging. For instance, photovoltaic devices have been adopted to collect solar energy, thermoelectronics for thermal energy, triboelectric and piezoelectric generators for mechanical energy, respectively.

In this review, we mainly focus on the recent research progress of flexible energy storage devices (e.g., batteries and supercapacitors), self-powered systems, and their applications in integrated wearable bioelectronics, as shown in Fig. 1. First, an overview of commonly adopted methods for fabricating flexible energy devices will be provided. They are classified as chemical methods and physical methods, which will be discussed in Section 2. Moreover, representative reports on self-powered systems based on flexible energy devices will be introduced in Section 3, including their working principles and novelties. In Section 4, biosensing devices' physiological and physical signal detection that can be integrated with flexible energy devices are summarized. Discussion on future perspectives of flexible energy storage devices will be included in Section 5.

2. Fabrication methods

The commonly adopted fabrication methods for flexible energy storage devices are summarized in this section. Generally, material synthesis and device fabrication can be categorized into chemical methods and physical methods, respectively. The morphology and properties of active materials with energy storage capability can be modified via various approaches. As for chemical methods, the morphology modification of the active material can be achieved by changing the reaction conditions, leading to optimizing the device performance. Besides, it has higher compatibility with complicated micro-nanostructures. Physical methods, such as coating and sputtering, provide approaches for material loading and

Correspondence to: Y J Lin, linyj2020@sustech.edu.cn

Received 30 JUNE 2021; Revised 28 AUGUST 2021.

©2021 Chinese Institute of Electronics

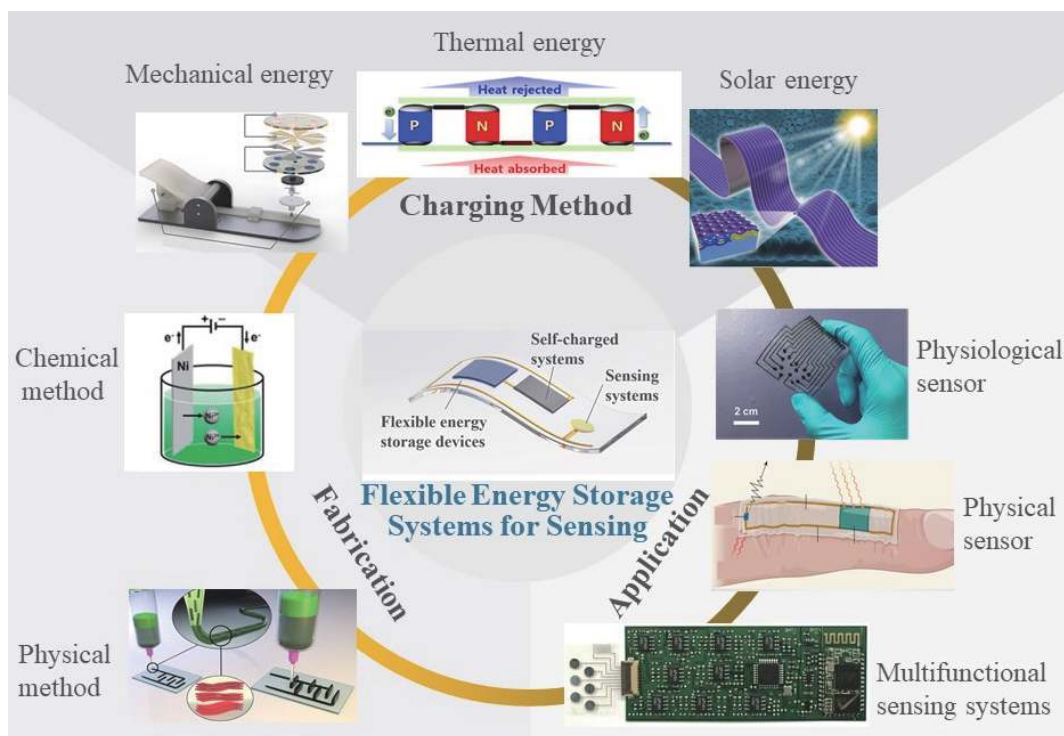


Fig. 1. (Color online) The fabrication methods and energy sources for flexible energy storage devices and their applications in wearable bio-sensing^[8–15].

device construction on flexible substrates, usually in the form of thin films^[16].

2.1. Chemical method

Hydrothermal synthesis: Hydrothermal synthesis refers to a method of preparing materials by dissolving and recrystallizing the powder with water as the solvent in a sealed vessel. In recent years, it is reported that metal-organic frameworks, nanostructures, hybrids of organic polymers, metal oxides, and other substances can all be formed on the substrate by hydrothermal synthesis^[17–19]. As shown in Fig. 2(a), Wu and coworkers utilized a liquid phase reaction to primarily grow dodecahedral 2-methylimidazole cobalt (ZIF-67) crystal on carbon cloth. Then the ZIF-67 crystal is gradually transformed into a hollow manganese dioxide (MnO_2) polyhedron through a hydrothermal reaction^[20]. When tested, the aqueous battery showed a high reversible capacity of 263.9 mA-h/g after 300 cycles, and its performance far exceeded that of the commercial MnO_2 electrode. Furthermore, different nanomaterials such as nanospheres, nanocomposite films and nanoneedle arrays are frequently fabricated as anodes and cathodes via hydrothermal synthesis^[21–23]. The reaction conditions of the hydrothermal synthesis are relatively facile and are highly controllable to ensure the stability of the synthesis. For instance, Wang's group summarized controlled hydrothermal synthesis of lithium iron phosphate (LiFePO_4) cathode for LIBs, and the LiFePO_4 nanorods exhibited a high capacity of 155 mA-h/g at 0.5 C and sustainable capacitance retention of 80%^[24].

Electrochemical deposition: By applying an electric potential in an ionic solution to trigger a reduction or oxidation reaction, a layer of desired materials can be directly deposited onto the conductive substrate. Generally, it relies on a three-electrode system with the working electrode, the counter elec-

trode, and the reference electrode. The unique advantages of electrochemical deposition include: (1) During the metal reduction process, the potential difference, solution concentration, and ambient temperature can be adjusted to control the morphology of the product. (2) The electrolyte can be mixed with various metal salt solvents, which enables composite active materials. (3) The reaction conditions are relatively mild, and the synthesis can be completed at room temperature and atmospheric pressure. Therefore, it is widely used for flexible electrodes functionalization with metals, metal oxides and polymers. For instance, Fig. 2(b) illustrates that metal nanoparticle layers were assembled on insulating paper via layer-by-layer metal electrodeposition to prepare conductive paper, which retained the porous structure of the original paper and delivered an area capacitance of 811 mF/cm^2 ^[10]. In Singh's work, transparent core-shell MnO_2 and gold (Au) coated nanofiber network electrodes were fabricated by electrodeposition, which showed mechanical flexibility, high energy density, high transparency, and long-term cycling stability^[25]. A flexible and transparent supercapacitor was further developed and delivered a high energy density of 0.14 $\mu\text{W}/\text{h}/\text{cm}^2$, along with a high areal capacitance of 2.07 mF/cm^2 .

Microwave-assisted synthesis: Microwave-assisted synthesis achieves material deposition via chemical reactions within the electromagnetically heated electrolytes. It can be applied to the synthesis of porous materials, inorganic complexes, nanocrystalline particles, organic compounds and so on^[26–30]. Compared with conventional hydrothermal synthesis, microwave passes through the material and provides energy. Thus, the heating process is rapid and uniform, which enables fast and energy-efficient synthesis. Nonetheless, it is relatively challenging to precisely control the reaction temperat-

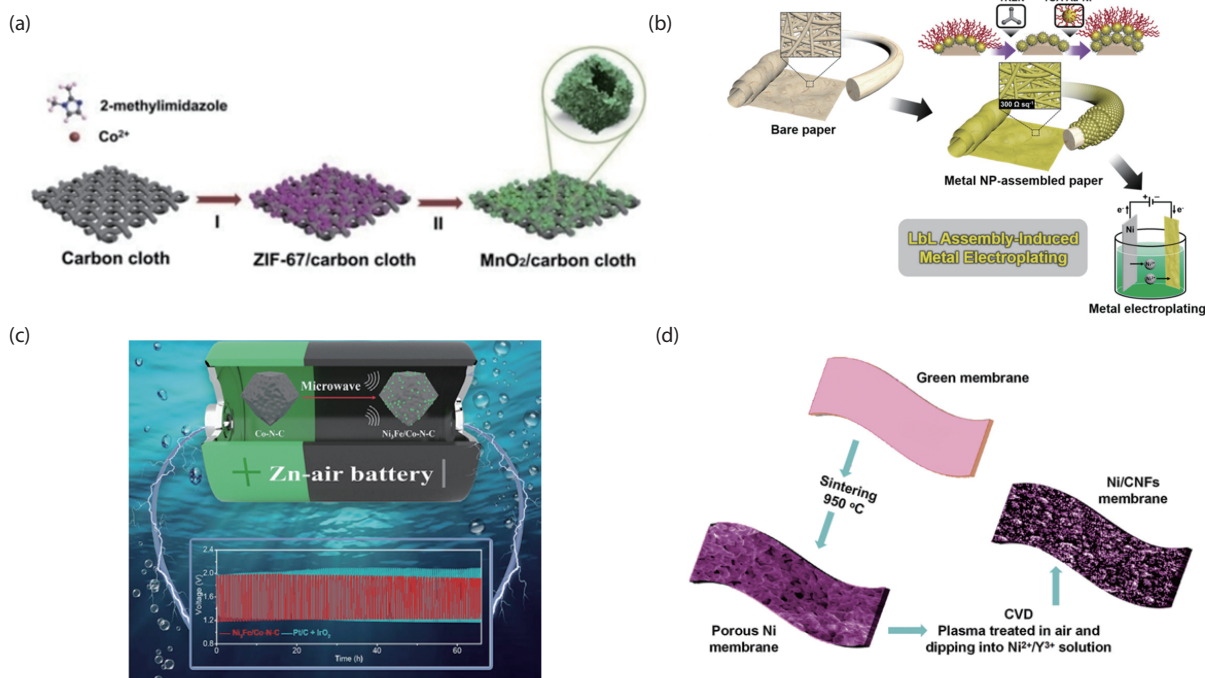


Fig. 2. (Color online) Chemical methods for flexible energy storage devices fabrication. (a) Two-step hydrothermal synthesis of MnO_2 nanosheet-assembled hollow polyhedrons on carbon cloth^[20]. (b) Metal-like conductive paper electrodes based on Au nanoparticle assembly followed by nickel electroplating^[10]. (c) A microwave-assisted rapid synthesis of nickel-iron-based catalysts for rechargeable zinc-air battery^[32]. (d) Synthesis of 3D nanofiber electrode via CVD^[36].

ure and form factors of the produced materials. Jeon's group endowed pristine carbon cloth with large surface area, porosity and high specific capacitance via microwave-assisted functionalization. The supercapacitor based on carbon cloth delivered a maximum energy density of $64 \mu\text{W}\cdot\text{h}/\text{cm}^2$ at a power density of $1 \text{ mW}/\text{cm}^2$ with long-term cycling^[31]. Fig. 2(c) illustrates the exploration of advanced nickel-iron-based catalysts for rechargeable zinc-air batteries via microwave-assisted synthesis^[32]. As a result, four flexible zinc-air batteries were connected in series to power a mobile phone and showed high cyclic stability under different bending states.

Chemical vapor deposition (CVD): When two or more gaseous raw materials are mixed into a reaction chamber, the chemical reaction can be triggered to form materials on the substrate surface. It is the most widely used technology in the semiconductor industry for the synthesis of materials such as Si nanofiber, graphene, and carbon nanotube (CNT)^[33–35]. As shown in Fig. 2(d), Zhang's group fabricated the three-dimensional (3D) nanofiber electrode via CVD. It provided relatively high controllability, and the as-fabricated supercapacitors exhibited high capacitance stability of 96.5%^[36]. In addition, Zang and his coworkers manufactured novel 3D CNT-graphene and 3D CNT-CNT network structures as electrodes, which showed enhanced energy density for supercapacitors^[37]. Besides, nanotube and nanofiber films prepared by CVD methods have been widely adopted as anodes for lithium-ion batteries (LIBs)^[33, 38]. For instance, Yang *et al.* presented an aprotic lithium-oxygen battery with a high discharge capacity of $11512.4 \text{ mA}\cdot\text{h}/\text{g}$ and long cycle life of 130 cycles^[39]. CVD provides an inexpensive and facile method to fabricate functionalized flexible materials for energy storage applications without the use of special or toxic atmo-

sphere, which makes it popular in industry.

2.2. Physical method

Coating: A slurry consisting of active electrode powder with conductive additives and binders is prepared and smeared onto the substrate. Post-annealing or drying is normal. It is one of the most frequently adopted methods to fabricate flexible electrodes. For instance, Manjakkal and coworkers designed a sweat-activated flexible supercapacitor using the coating method^[40]. The valuable device exhibited energy and power densities of $1.36 \text{ W}\cdot\text{h}/\text{kg}$ and $329.7 \text{ W}/\text{kg}$, respectively. Besides, Dai's group utilized the coating method to fabricate supercapacitors based on activated carbon. The devices showed significantly improved cyclic stability and rate capability^[41]. Fig. 3(a) shows that flexible CNT-based cathodes with controllable thicknesses are successfully fabricated via a facile blade-coating method, and the pouch cell shows impressive cyclic stability under both balanced state and bent state^[42].

Infiltration: Infiltration as a mild and low-cost material loading process has been widely employed for porous materials, such as woven cloth, paper, or sponges. Thin films of materials can form on the surface of the substrate. For instance, polyaniline (PANI) has been loaded on the functionalized carbon cloth in the diluted solution via infiltration^[20, 30]. It then served as a flexible electrode in a symmetrical supercapacitor, which presented the area capacitance of $350.8 \text{ F}/\text{g}$ and high capacitance retention of 90.8% for 10 000 cycles. In Song's work, a lithium-sulfur-infiltrated catholyte was efficiently infiltrated into the carbon cloth during cell fabrication^[43]. This carbon cloth cathode was reported with a high areal capacity of $3.2 \text{ mA}\cdot\text{h}/\text{cm}^2$ for 200 cycles with a sulfur loading of $6 \text{ mg}/\text{cm}^2$, and the battery cells remained functioning even

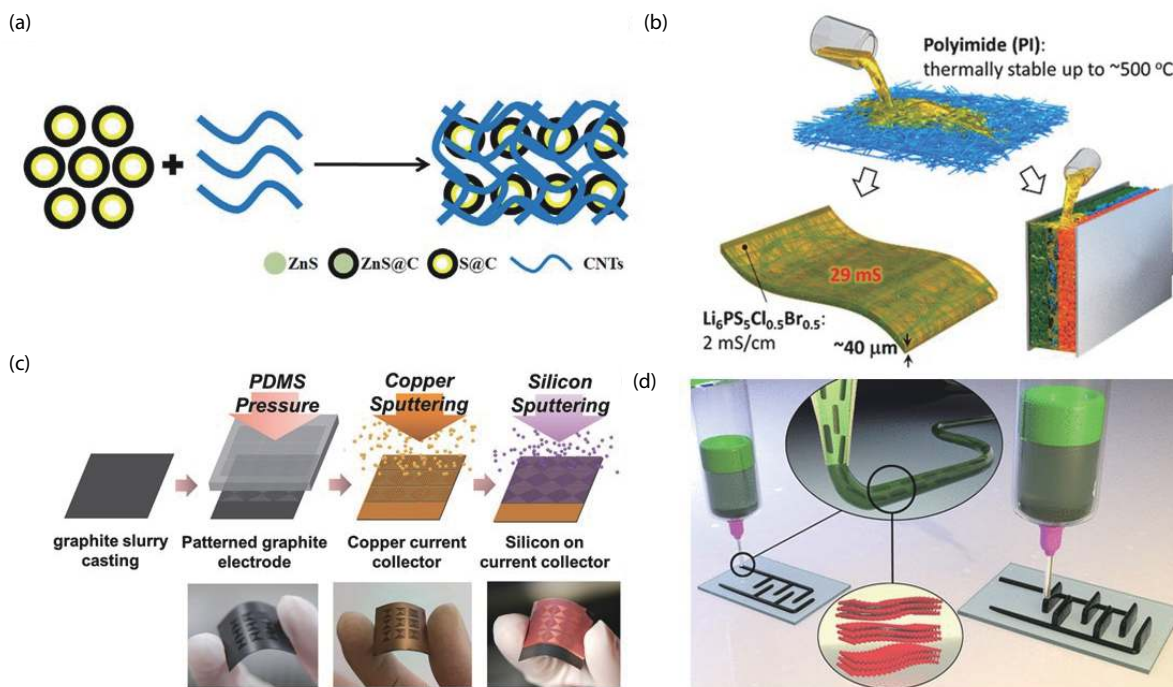


Fig. 3. (Color online) Physical methods for flexible energy storage devices fabrication. (a) The coating process to achieve flexible CNT-based cathodes^[42]. (b) Infiltration of electrospun porous polyimide nanowires for sulfide solid electrolyte membranes^[44]. (c) Fabrication of graphite/Si hybrid electrode via sputtering^[46]. (d) Schematic of the 3D printed interdigital electrodes for micro-supercapacitors^[11].

after 300 factitious bending cycles. Moreover, Kim *et al.* fabricated all-solid-state LIBs using electrolyte-infiltrated polyimide film, which exhibited promising electrochemical performance (146 mA·h/g) as well as excellent thermal stability (up to ~400 °C)^[44]. Fig. 3(b) illustrates the fabrication of the sulfide solid electrolyte membrane by infiltrating electrospun polyimide nanowires. Infiltration shows its compatibility and scalability for manufacturing composite electrodes on a large scale.

Sputtering: Sputter deposition involves ejecting material vapor from a target source onto the substrate. Although the process is of high cost and relies on complex equipment, it can well control the thickness and quality of the thin films. For instance, pseudocapacitive materials can be conformally coated on self-supported CNT-aligned films by magnetron sputtering to fabricate fiber-shaped supercapacitors^[45]. Such self-supported materials deposited by magnetron sputtering can be widely used for wearable bioelectronics. Besides, it is capable of materials loading on substrates with micro/nanostructures. Fig. 3(c) illustrated the two-step sputtering method to prepare graphite/silicon hybrid electrodes on 3D current collectors for flexible batteries^[46]. A remarkable enhancement of 19.7% on specific capacity was obtained, and the overall capacity of 108 mA·h/g at 0.5 C was achieved.

3D printing: 3D printing is an additive manufacturing method to construct 3D objects in a layer-by-layer manner following the designed 3D model. Therefore, it can fabricate 3D objects with attractive geometric characteristics based on a variety of materials, including metals, plastics or composite materials, etc.^[11, 47, 48]. Orangi and coworkers adopted 3D printing to construct electrode patterns with conductive ink^[11]. Fig. 3(d) shows the schematic of printing interdigital electrodes, and the height of the printed metal carbides and nitrides (Mxene) ink electrodes can be increased by printing additional layers. The printed solid-state micro-supercapacit-

ors exhibited excellent electrochemical performance with a surface capacitance of 1035 mF/cm². In addition, a variety of high-quality batteries, including LIBs, nickel-iron batteries, iron (III) periodate and zinc batteries, have shown distinct advantages via 3D printing^[49–51]. For instance, Lee's group fabricated yarn-type LIBs by direct ink writing-based 3D printing technology^[52]. The technology facilitates its integration into commercial fabrics such as woolen gloves and develops a new strategy for next-generation smart fabrics.

3. Self-powered systems

A self-powered system is defined as a system that operates by utilizing the ambient energy presenting in the system environment without external charging^[53]. Especially for wearable electronics, the self-power capability can elongate the device duration time and reduce the recharging frequency^[54, 55]. However, energy harvesting and conversion from the environment might result in fluctuations in power output, which might fail to fulfill the requirements of sustainable power supply for electronic devices. To tackle this challenge, the integration of flexible energy storage devices, such as batteries or supercapacitors, can serve as energy buffers and release the stored energy when required. Here, the advances of flexible energy storage devices integrated with energy harvesting components, including solar cells, thermal cells and mechanical nanogenerators will be summarized.

3.1. Solar energy

Solar energy is an ancient energy source with universal harmlessness and long-term sustainability. The design of flexible power supplies that integrate batteries and amorphous silicon solar modules have been frequently reported. Among these batteries, LIBs, zinc-ion batteries and aluminum-air batteries are commonly used to power health-monitoring

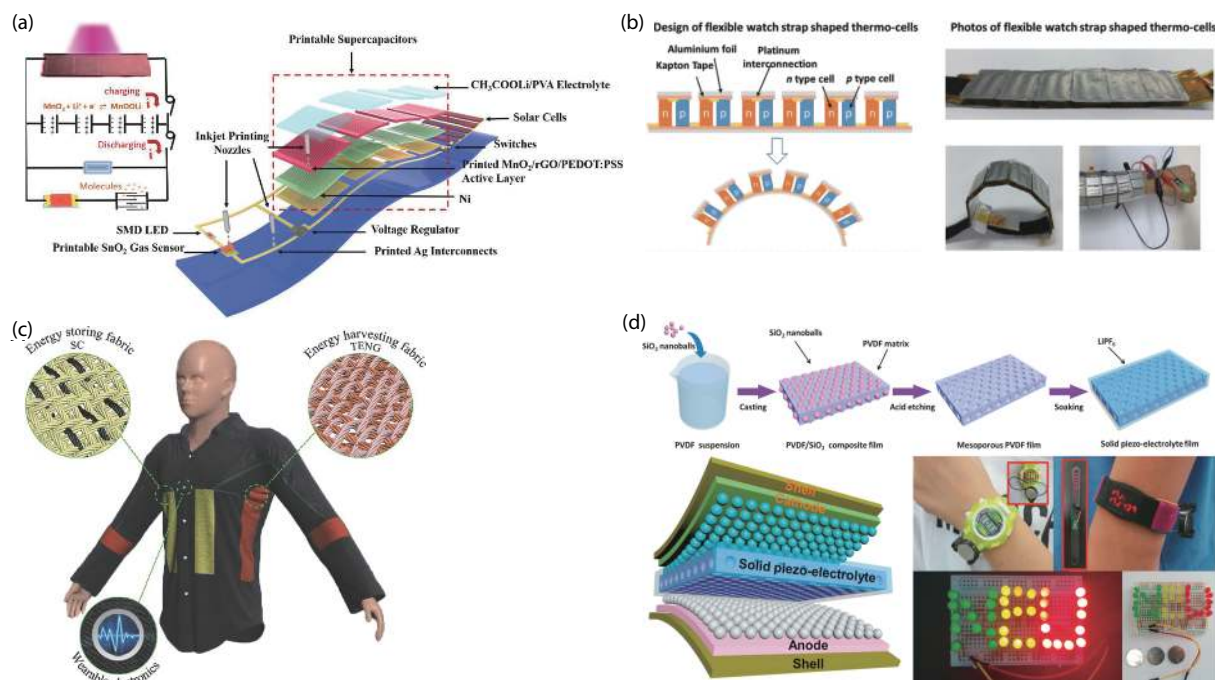


Fig. 4. (Color online) Self-powered systems consists of flexible energy storage devices and energy harvesting components. (a) Schematic of a printable self-powered system consists of solar cells, supercapacitors and gas sensor^[60]. (b) Design of a thermocell for harvesting body heat and charging supercapacitors^[63]. (c) Self-powered cloth consists of TENG, supercapacitor and wearable sensor^[69]. (d) An all-solid-state self-powered system with high performance PENG using a particular mesoporous film^[73].

devices^[56–59]. Ostfeld *et al.* designed a self-powered system that combines a photovoltaic (PV) module and a LIB composed of a printed graphite-based anode and a lithium oxide cathode^[56]. By selecting a load duty cycle appropriately, the system could balance the current between the battery and the PV module to maintain a constant charge. Finally, the battery was used in a pulse oximeter after 600 mechanical bending cycles, and its capacity remained at least 90%, proving its effectiveness as a power source for wearable sensing systems. The system can be integrated into wearable devices such as jacket sleeves, bags and travel mugs with excellent flexibility.

Similarly, solar energy can also be stored in supercapacitors as shown in Fig. 4(a)^[60]. Fan's group successfully realized a printable and flexible self-powered system utilizing solar energy to drive a gas sensor. The solar energy can also be stored in supercapacitors and released to ensure continuous operation when interruption from illumination variation occurs. Dong *et al.* also manufactured and described a printable dye-sensitized solar cell (DSC) integrated with a supercapacitor^[61]. Under sunlight exposure, the supercapacitors were charged by the current generated in DSC and then discharged with a capacitance of 0.14 mF/cm². The electrical performance was tested outdoors under different extreme bending conditions. The stable data highlights the device's performance under various extreme mechanical load conditions and paves the way for future highly flexible integrated energy systems.

3.2. Thermal energy

Thermal energy can be collected around our environment and from human bodies as well. By setting a temperature difference between the edges of two semiconductors of different properties, it generates a direct-current voltage at

both ends. Thermoelectric modules can be used as nanogenerators based on the Seebeck coefficient, which are electrically in series and thermally in parallel to function uninterruptedly 24 h a day^[62].

Body thermal energy is one of the easily accessed energy sources for wearable bioelectronics and has attracted increasing research interest. Fig. 4(b) illustrates a thermocell for harvesting body heat and can provide constant power for supercapacitors reported by Liu and coworkers^[63]. It utilized the temperature gradient between the two surfaces of an object, namely, the thermoelectric effect (TE), to create a typical TE module. Connected with multiple p–n cells in series, sandwich structures of n-type and p-type semiconductors were successfully matched in these thermocells, and an incremental potential to 0.34 V at $\Delta T = 10$ K was obtained. Furthermore, a supercapacitor was charged by collecting body heat and then was applied to illuminate green light-emitting-diodes (LEDs). Wang's group fabricated a LIB for simultaneously stored the harvested thermal, mechanical and solar energies^[64]. Therefore, stable electrical energy at comparable output power can be achieved compared with self-powered systems consisting of only active harvesters such as triboelectric or piezoelectric generators.

3.3. Mechanical energy

Triboelectric nanogenerator (TENG): The triboelectric nanogenerators convert mechanical energy based on the combination of the triboelectric effect and electrostatic induction. Various micro/nanostructured materials have been adopted to realize TENG-supercapacitor systems such as thin films, foams, soft rubbers and fabrics^[8, 65–69]. Fig. 4(c) shows a self-charging power textile in one piece of cloth with excellent mechanical flexibility reported by Pu *et al.*^[69]. It consists of three functional units: the TENG fabric for energy harvesting, the superca-

Table 1. Summary of recent flexible energy storage devices integrated with sensing systems.

Category	Material	Cycle	Capacitance/Capacity	Novelty	Biosensing application	Ref.
Supercapacitor	Graphene-silver-3D foam	25 000	38 mF/cm ²	Excellent cycling stability	pH sensor	[79]
	The sheath-core yarn	10 000	761.2 mF/cm ²	Highly stretchable	Strain sensor	[80]
	Nanosheets of CoSe ₂ on CNT Textile	4000	593.5 mF/cm ²	Superior mechanical stability	Opto-sensor	[81]
		10 000	644 mF/cm ²	Excellent flexible stability	Glucose sensor	[82]
	Boron-carbon nanosheets	10 000	534.5 F/cm ³	Large interlayer conductivity	Pulse sensor	[83]
	Sweat as the electrolyte	4000	10 mF/cm ²	Sustainable and safe	Sweat sensor	[40]
Battery	Lithium-air battery	1000	680 mA-h/g	High energy density	Physiological sensor	[84]
	Zinc-air battery	6000	2.6 mA-h/cm ²	High safety and high force-resistance	Gesture sensor	[85]
	Zinc-MnO ₂ battery	1000	277.5 mA-h/g	Highly compressible	Pressure sensor	[86]
	Aqueous zinc-ion fiber	5000	371 mA-h/g	High specific capacity	Strain sensor	[87]

pacitor fabric for energy storage and wearable electronics for sensing. The self-charged power textile achieved high capacitance (72.1 mF/cm²) and stable cycling performances (96% for 10 000 cycles). However, the system showed a limitation of unstable energy output and a short operational time. Chun *et al.* proposed an all-in-one self-powered system for touch sensing with flexible and transparent electrodes^[70]. The TENG component could harvest high electric power (1.45 mW/cm² with 17 kPa) when touched. The supercapacitor exhibits a high capacitance of 3.83 μ F/cm² and stable performance without degrading the ultrahigh transparency (77.4%). Meanwhile, the tactile sensor could detect non-contact/contact touches by measuring the capacitance change.

Piezoelectric nanogenerator (PENG): Piezoelectric components can convert slight vibration or strain differences into electrical energy and then power downstream circuits. Nanostructured and flexible materials have been frequently used to fabricate PENG in wearable applications^[71, 72]. For instance, He *et al.* fabricated an all-solid-state self-powered system using mesoporous films to generate piezoelectric effect as shown in Fig. 4(d). The self-powered system was charged by compressive deformation, and the overall capacity is 0.118 μ A-h within 240 s. Such self-powered module based on PENG successfully powered up a smartwatch, sports wristband and array of LEDs, respectively, indicating its potential applications for self-sustainable wearable electronics^[73].

In addition, the development of hybrid nanogenerators with high electrochemical stability has received much attention in recent years^[3]. For instance, a self-arched nanogenerator (SANG) with a combination of triboelectric and piezoelectric effects is designed for real-time monitoring of pulse waveform by Li's group^[74]. This unique device structure and mixed effect of triboelectric and piezoelectric contribute effectively to SANG's stability and sensitivity. Moreover, Jiang *et al.* demonstrated a free-rotating hybrid nanogenerator constituted by a triboelectric and an electromagnetic generator. It can provide power for calculators, wireless temperature sensors and even charging mobile phones^[15]. The integration of energy storage devices with hybrid nanogenerators significantly contributes to the development of bioelectronics with desirable self-power capability.

4. Flexible energy storage module for sensing applications

A variety of flexible energy storage devices charged by

different self-powered systems were reviewed, and they could be further integrated for sensing applications. In addition, wireless wearable bioelectronics has gained tremendous attraction due to its potential for non-invasive health monitoring^[75]. The integration of the wireless data transmission module in wearable biosensing systems enables real-time analysis of target analytes levels and remote monitoring^[76–78]. While it poses higher requirements for the power supply module in wearable electronics. This section will introduce the sensing applications for flexible energy storage devices, including physiological and physical signal detection. And Table 1 has summarized recent flexible energy storage devices integrated with sensing systems, and their superior performance is also involved.

4.1. Physiological signal detection

Sodium sensors: The sodium ion is indispensable in our daily life, and it is essential for human healthcare. Typically, clinical sodium monitoring relies on instruments like inductively coupled plasma mass spectrometry. With the advancement of sensor manufacturing methods, sweat sodium can be detected with high sensitive ion sensors. Sodium sensors can be embedded in a flexible system and integrated with signal processing circuits. Fig. 5(a) shows a flexible sodium sensing patch that can be self-powered^[78]. In this system, Dahiya's group carried out a stable sodium measurement from perspiration on the skin. The perspiration also served as a biofuel for energy supply. The measured sensitivity of Na⁺ is 55.5 \pm 0.3 mV per decade when the entire device is under continuous movement, which indicates a safe and sustainable perspective for wearable bioelectronics. Nevertheless, other power supply methods, such as human movement, are also fulfilled in practical applications^[88, 89]. Since high energy consumption is a critical problem when biosensors are attached to the human body, efficient energy supply from human motion represents a fascinating approach to sustainably driving wearable bioelectronics.

Glucose sensors: Glucose levels in human fluids are significant health state indicator, especially for diabetes diagnostics. Therefore, wearable devices for glucose monitoring have long been a research focus. Interestingly, some materials can be simultaneously utilized for excellent glucose-sensing performance as well as energy devices^[90, 91]. Ngo and coworkers adopted nickel oxide and graphitic carbon nitride hybrid nanostructure for electrode fabrication for both the glucose

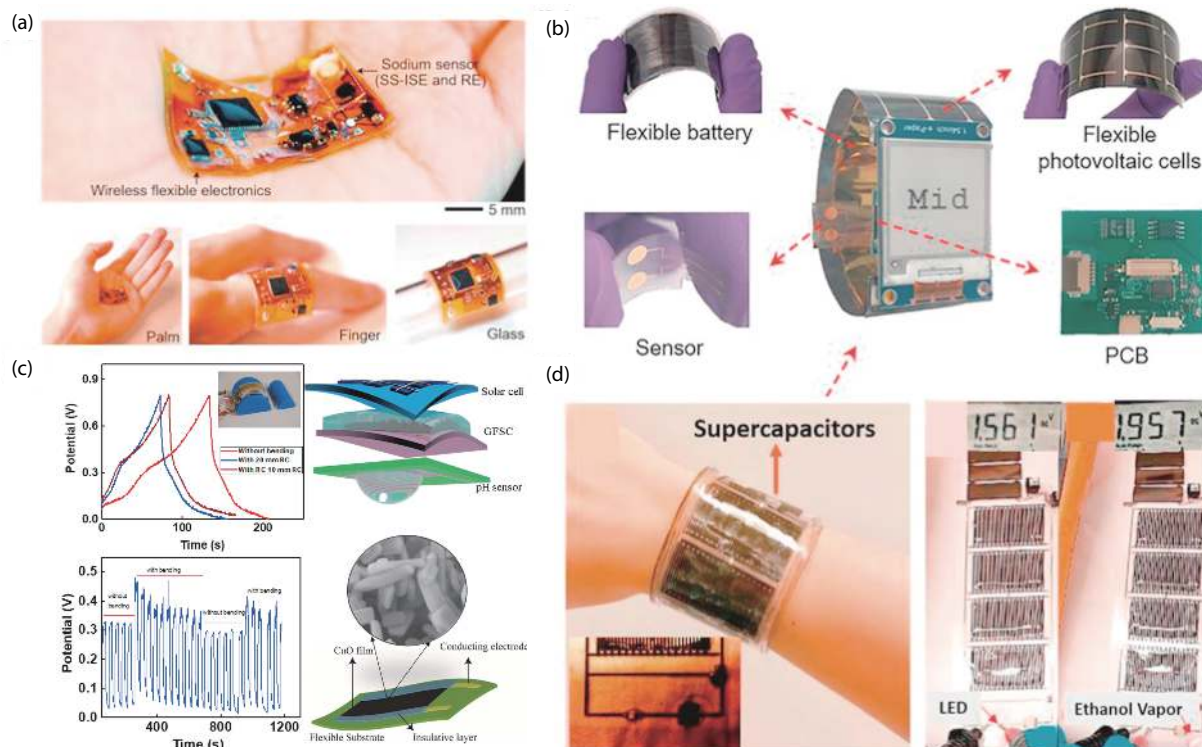


Fig. 5. (Color online) Physiological sensing systems integrated with flexible energy storage devices. (a) An all-in-one, and flexible self-powered sodium sensing patch with wireless data transmission^[78]. (b) A self-powered smartwatch for non-invasive sweat glucose monitoring^[92]. (c) Schematic of a self-powered system with pH sensor and its performance under dynamic bending conditions^[79]. (d) A self-powered wristband that can power up LED as an indicator of gas detection^[60].

sensor and symmetrical supercapacitor. A high glucose sensitivity of $5.387 \text{ mA}/(\text{mM}\cdot\text{cm}^2)$ was obtained, and an energy density of $1.06 \text{ kW}/\text{kg}$ was also observed. However, it is relatively challenging to monitor the sweat glucose because it is less concentrated and other composites in sweat could affect the sensing accuracy. Fig. 5(b) illustrates a self-powered smartwatch for specifically non-invasive glucose monitoring^[92]. In this work, Zhao *et al.* proposed a Zinc- MnO_2 battery that served as a flexible energy storage device. It retained 91.86% of the initial capacitance after 1000 cycles of charging/discharging at $1.8 \text{ A}/\text{g}$ while the self-powered system was charged up to 6.0 V within 1 h under bright sunlight. Apart from batteries, flexible supercapacitors can also provide energy for glucose sensors. Sun *et al.* reported that a flexible supercapacitor could power enzyme-free biosensors, and it also had a high sensitivity for glucose detection ($592 \text{ }\mu\text{A}/\text{mM}$)^[82]. However, long-term reliable glucose sensors remain a challenge for real-time biosensing applications.

pH sensors: As the pH values inside human body are relatively stable, pH sensors are more commonly adopted in sweat sensing. For instance, Manjakkal's group invented a sweat-activated battery that simultaneously monitored heart rate, sweat chloride and sweat pH^[79]. Also, a single pH sensor was proposed with a flexible graphene foam supercapacitor. Fig. 5(c) shows the 3D schematic of a self-powered system with a pH sensor and its performance under dynamic bending conditions. The self-charged supercapacitor exhibited a capacitance of $38 \text{ mF}/\text{cm}^2$ and an energy density of $3.4 \text{ }\mu\text{W}\cdot\text{h}/\text{cm}^2$. The electrochemical and supercapacitive performance indicated its further applications, such as multi-sensing e-skin for human healthcare monitoring.

Gas sensors: A gas sensor can convert a certain gas volume fraction such as the composition and concentration into a corresponding electrical signal that can be further analyzed. Gas sensors are generally classified according to the detection of different chemicals, such as hydrogen, oxygen, ammonia gas, nitrogen dioxide, sulfur dioxide, etc.^[93–96]. They have wide applications from personalized healthcare to environmental monitoring. A variety of strategies for scalable device manufacturing and facile system integration have shown great potential for wearable devices. Lin *et al.* fabricated a fully integrated sensing system powered by supercapacitors on plastic substrates^[60]. Fig. 5(d) demonstrates that the as-fabricated self-powered wristband can power LEDs as an indicator of gas detection. In particular, the flexible supercapacitors provided an area capacitance of $12.9 \text{ mF}/\text{cm}^2$, which could power the high-sensitivity tin oxide gas sensor at room temperature. Besides, micro-electromechanical sensing systems with significantly reduced device volume could enable a higher sensor array density. It also allows the integration with rechargeable and flexible energy devices to achieve reliable and repeatable device performance. Benedict *et al.* proposed a gas mapping system with a wireless communication module to track the global pollution levels by continuous and remote-controllable gas sensing^[97]. It is believed with flexible energy devices, the sensing system will have practical applications for wearable biosensing and environment protection as well.

Humidity sensor: Humidity sensors have been investigated for industrial applications while attracting increasing research interest for biosensing. Various sensing materials are proposed for high-performance humidity sensing systems, in-

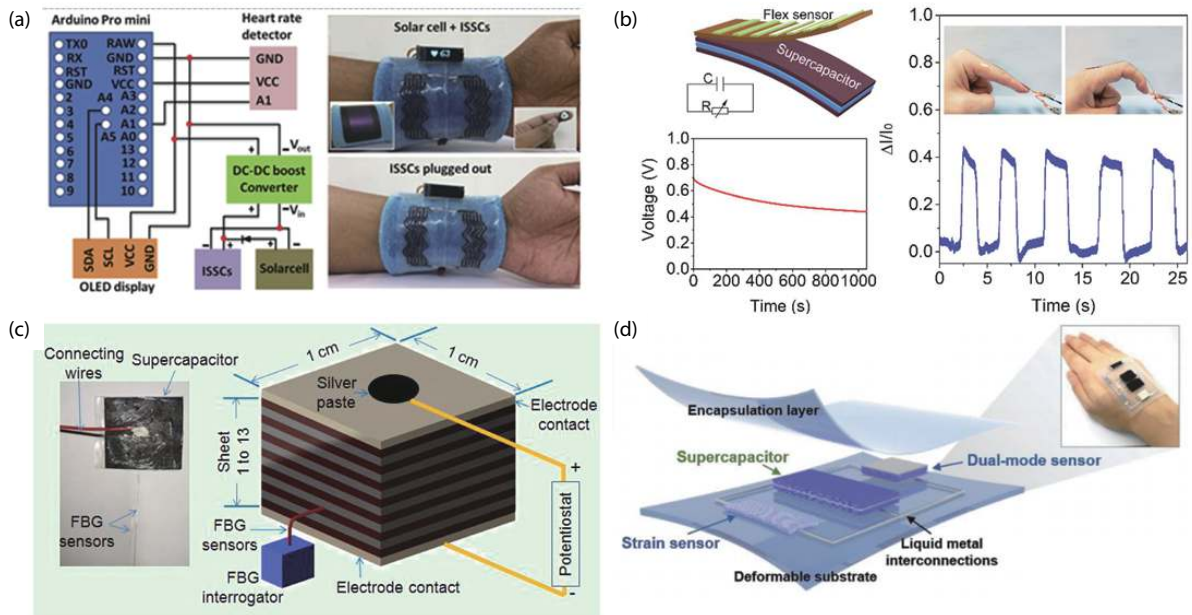


Fig. 6. (Color online) Physical sensing systems integrated with flexible energy storage devices. (a) A screen-printed flexible solid-state supercapacitor for self-powered pulse sensing^[106]. (b) Schematic illustration of an integrated self-powered tactile sensor^[114]. (c) The structure design of the FBG sensor for in-situ temperature measurement^[117]. (d) Integration of the dual-mode strain sensor and supercapacitor on a deformable substrate^[126].

cluding metal oxides, carbon materials, polymers, cellulose, etc.^[98–102]. Pereira and coworkers fabricated a polymer humidity sensor and a printed battery made of lithium iron phosphate to form an all-printed smart label^[103]. The printed humidity sensor had a linear response with a sensitivity of 0.004% relative humidity. However, the printed battery cannot support long-term power supply at this stage. It was recently reported that an all-solid-state flexible capacitor provided a higher capacitance to drive a humidity sensor^[104]. This textile supercapacitor exhibited a specific capacitance of 8.01 F/g and a high cyclability of 5000 cycles. Without additional charging, it can drive commercial high-power sensors for 47 min.

4.2. Physical signal detection

Pulse sensors: Pulse sensors can detect the pressure change generated during arterial pulsation and convert it into an electrical signal that can be observed in a straightforward manner. Self-sustaining power packs have been demonstrated to power the pressure sensor and monitor human physiological signals^[105]. In Xu's work, photovoltaic devices and supercapacitors were integrated into an assembled power pack. It provided stable power output for pulse sensing regardless of the sunlight fluctuation, demonstrating its potential applications in future wearable electronics. In addition, Rajendran *et al.* proposed a screen-printed flexible solid-state supercapacitor for self-powered pulse sensing systems as shown in Fig. 6(a). The system demonstrated excellent mechanical stability with and serpentine independent interconnections^[106]. The supercapacitor based on cured CNT electrodes showed an areal capacitance of 62 mF/cm² at an applied current density of 0.19 mA/cm², and only a decrement of 10% during stretching was observed. The pulse sensor was successfully powered even at low intensity in outdoor sports activities, proving its feasibility in personalized health monitoring. Yu and coworkers designed graphene-based electrodes

for both supercapacitors and pressure sensors in a physiological signal sensing system^[107]. Apart from supercapacitors, flexible batteries also have been demonstrated to power a wearable pulse sensor^[108]. Li *et al.* reported a flexible solid-state zinc ion battery with desirable operational safety. It delivered a power density of 148.2 mW/cm² and excellent cycle stability (maintained at 97% after 1000 cycles). It successfully replaced the commercial battery pack for a smartwatch and supported pulse sensing.

Tactile sensors: With the development of microelectronic technology and the emergence of various organic materials, a variety of tactile sensors have been proposed for strain and pressure sensing. They play an increasingly important role in wearable devices for artificial intelligent body monitoring^[109]. Typical substrates for tactile sensors fabrication include hydrogels, papers and textiles^[110–112]. Dai's group reported the fabrication of unique sheath-core yarn to construct devices with high energy storage capacity and a highly multifunctional sensing system^[80]. The integrated electronic effectively monitored human body motions including different ranges of stress deformations. It exhibited an ultrahigh strain sensing range (0–350%) as well as an excellent capacitance of 761.2 mF/cm² at the scanning rate of 1 mV/s. Shit *et al.* reported a self-powered capacitive sensor could be used on the skin to sense the human heartbeat, pulse and voice^[113]. Besides, a physical stimulus that may cause a change in physical size or dielectric constant will introduce a measurable change in capacitance. Fig. 6(b) shows a self-powered flex sensor integrated with and its sensing responses to different bending angles proposed by Xu's group^[114]. The system used Mxene nanosheets to fabricate flexible supercapacitors. The sensing response current increased with the bending degrees. Such self-powered and wearable systems can be widely adopted in human-machine interfaces and biological monitoring.

Temperature sensors: According to the measurement

method, temperature sensors can be divided into contact and non-contact sensing. While temperature sensors are now widely used in industrial and agricultural life, reports on the combination of flexible temperature sensors and energy storage devices for wearable applications are rare^[115]. Hong's group reported a smart skin temperature patch that could fit the skin conformally and continuously monitor biological data for assessing physical condition^[116]. This work shows the potential for smart patches to monitor non-febrile conditions in the community as well as non-invasively monitor individuals' body temperature, even in real-life situations. In addition, Seema and coworkers designed a fiber Bragg grating (FBG) sensor for in-situ temperature measurement, integrated with flexible planar supercapacitors into a self-powered device^[117]. Fig. 6(C) shows the structure design of the FBG sensor. The bending angle changes according to the measured temperature in the surrounding environment.

Opto-sensors: Photodetectors can detect the conductivity of the irradiated material changes due to radiation, and it is widely used in the range of visible spectrum, infrared spectrum and UV spectrum^[118–120]. Applications and the powerful functions of fibrous photodetectors have been reported. Yildirim *et al.* reported a self-charging photodetector based on nanowires^[121]. The nanowire can receive light energy and light information simultaneously. In other words, the nanowire serves as a nanogenerator to power itself and a photodetector to sense light signals. Recently, Zong's group invented a high-performance flexible supercapacitor based on cobalt selenide (CoSe₂) and CNT film^[122]. It generated a stable output voltage of 1.8 V and a high energy density of 0.25 mW-h/cm². In addition, a CoSe₂/CNT-based photodetector was powered up, and fast response was observed under different wavelengths.

As discussed above, wearable sensors play an essential role in physiological and physical signal-detecting fields, and they can record continuous signals integrated with self-powered systems. Multifunctional sensing systems, including chemical and physical sensing, have also become a popular research area^[123–125]. Park and coworkers fabricated an integrated system of physical sensors and a supercapacitor on a wearable substrate using liquid-metal interconnections. As Fig. 6(d) shows, dual-mode and a strain sensor are integrated with a flexible supercapacitor and attached to the hand's skin^[126]. This study used microporous polypyrrole-coated graphene foam as the single functional material for the fabrication of active multifunctional sensors. Overall, such multifunctional sensing systems with sustainable power supplies have made exciting progress. It provides promising strategies to design a self-powered sensing system with considerations on safety, stability and biological conformality to fulfill the requirements for health monitoring applications.

5. Challenges and prospects

In recent years, rapid research advances have been achieved in flexible electrochemical energy storage, and many of them are adopted in commercially available products. The latest development on the integration of flexible energy storage devices into wearable bioelectronics is introduced in this review. The technology on material engineering and flexible device fabrication attract tremendous research interests, reflecting the urgent demand for flexible en-

ergy devices with desirable characteristics to power wearable sensing systems.

However, there still exist challenges on flexible energy storage devices for practical applications. Firstly, one of the critical issues for flexible devices lies in mechanical stability. While energy devices can be successfully constructed on various flexible platforms, most conductive current collectors and active materials for energy storage are intrinsically rigid. Therefore, mechanical interference such as bending, twisting and stretching could possibly introduce cracks within layers and device delamination. It will undoubtedly lead to poor device performance during charging and discharging and even raise safety concerns, such as organic electrolyte leakage. To tackle this challenge, innovation on flexible materials, structural device designs, and reliable approaches for back-end packaging are expected. Secondly, as the volume of the energy device keeps reducing to fulfill the requirements on device miniaturization, especially for wearable applications, its energy storage capacity decreases significantly. It could result in inadequate power supply during long-term operation. Especially for wearable biosensing applications that aim at real-time and long-term monitoring, its practical applications could be limited. In order to achieve the competitive energy capacity of flexible energy storage devices compared with their counterparts in rigid formats, several strategies have been proposed. For instance, the electrodes can be texturized with micro/nanostructures to increase charge storage and facilitate ion transfer to improve the energy density. Thirdly, for wearable biosensing applications, biocompatibility is one of the crucial considerations. The materials utilized for energy devices fabrication should be nontoxic and nonirritating to human skin. The flexible substrates and packing materials are also expected to provide attractive form factors such as air permeability and moisture conductivity, so as to improve the comfortability for wearing. In summary, it is believed that flexible energy storage would be developed and revolutionized with high mechanical and electrochemical stability, which is essential for their further integration with wearable bioelectronics for applications in personalized healthcare and robotics.

Acknowledgements

This work was supported by the Engineering Research Center of Integrated Circuits for Next-Generation Communications Grant (Y01796303) and Southern University of Science and Technology Grant (Y01796108, Y01796208).

References

- [1] Ernst T, Guillemaud R, Mailley P, et al. Sensors and related devices for IoT, medicine and smart-living. 2018 IEEE Symposium on VLSI Technology, 2018, 35
- [2] Huraj L, Šimon M, Horák T. Resistance of IoT sensors against DDoS attack in smart home environment. *Sensors*, 2020, 20, 5298
- [3] Wang C, Qu X, Zheng Q, et al. Stretchable, self-healing, and skin-mounted active sensor for multipoint muscle function assessment. *ACS Nano*, 2021, 15, 10130
- [4] Zhao Y F, Guo J C. Development of flexible Li-ion batteries for flexible electronics. *InfoMat*, 2020, 2, 866
- [5] Yu P, Zeng Y X, Zhang H Z, et al. Flexible Zn-ion batteries: Recent progresses and challenges. *Small*, 2019, 15, 1804760
- [6] He Y H, Matthews B, Wang J Y, et al. Innovation and challenges

- in materials design for flexible rechargeable batteries: From 1D to 3D. *J Mater Chem A*, 2018, 6, 735
- [7] Ghouri A S, Aslam R, Siddiqui M S, et al. Recent progress in textile-based flexible supercapacitor. *Front Mater*, 2020, 7, 58
- [8] Xiong W, Hu K, Li Z, et al. A wearable system based on core-shell structured peptide-Co9S8 supercapacitor and triboelectric nanogenerator. *Nano Energy*, 2019, 66, 104149
- [9] Huang H T, Lu L F, Wang J, et al. Performance enhancement of thin-film amorphous silicon solar cells with low cost nanodent plasmonic substrates. *Energy Environ Sci*, 2013, 6, 2965
- [10] Woo S, Nam D, Chang W, et al. A layer-by-layer assembly route to electroplated fibril-based 3D porous current collectors for energy storage devices. *Small*, 2021, 17, 2007579
- [11] Orangi J, Hamade F, Davis V A, et al. 3D printing of additive-free 2D $\text{Ti}_3\text{C}_2\text{T}_x$ (MXene) ink for fabrication of micro-supercapacitors with ultra-high energy densities. *ACS Nano*, 2020, 14, 640
- [12] He W, Wang C, Wang H, et al. Integrated textile sensor patch for real-time and multiplex sweat analysis. *Sci Adv*, 2019, 5, eaax0649
- [13] Zhang S M, Cicoira F. Flexible self-powered biosensors. *Nature*, 2018, 561, 466
- [14] Gao W, Emaminejad S, Nyein H Y Y, et al. Fully integrated wearable sensor arrays for multiplexed *in situ* perspiration analysis. *Nature*, 2016, 529, 509
- [15] Jiang D J, Ouyang H, Shi B J, et al. A wearable noncontact free-rotating hybrid nanogenerator for self-powered electronics. *InfoMat*, 2020, 2, 1191
- [16] Wang Y K, Yang Q, Zhao Y, et al. Recent advances in electrode fabrication for flexible energy-storage devices. *Adv Mater Technol*, 2019, 4, 1900083
- [17] Zheng S S, Li Q, Xue H G, et al. A highly alkaline-stable metal oxide@metal-organic framework composite for high-performance electrochemical energy storage. *Natl Sci Rev*, 2020, 7, 305
- [18] Naresh B, Punnoose D, Rao S S, et al. Hydrothermal synthesis and pseudocapacitive properties of morphology-tuned nickel sulfide (NiS) nanostructures. *New J Chem*, 2018, 42, 2733
- [19] Yin C J, Zhou H M, Li J. Facile one-step hydrothermal synthesis of PEDOT:PSS/MnO₂ nanorod hybrids for high-rate supercapacitor electrode materials. *Ionics*, 2019, 25, 685
- [20] Wu F F, Gao X B, Xu X L, et al. MnO₂ nanosheet-assembled hollow polyhedron grown on carbon cloth for flexible aqueous zinc-ion batteries. *ChemSusChem*, 2020, 13, 1537
- [21] Surthi K K, Kar K K, Janakarajan R. Shape controlled and structurally stabilized Co-doped olivine lithium phosphate cathodes for high voltage conventional, thin and flexible Li-ion batteries. *Chem Eng J*, 2020, 399, 125858
- [22] Zhu K X, Gao H Y, Hu G X. A flexible mesoporous Li₄Ti₅O₁₂-rGO nanocomposite film as free-standing anode for high rate lithium ion batteries. *J Power Sources*, 2018, 375, 59
- [23] Peng T, Hou X Y, Liu C, et al. Controlled synthesis of hierarchical CoMn₂O₄ nanostructures for flexible all-solid-state battery-type electrodes. *J Solid State Electrochem*, 2017, 21, 1579
- [24] Li Z J, Yang J X, Guang T J, et al. Controlled hydrothermal/solvothermal synthesis of high-performance LiFePO₄ for Li-ion batteries. *Small Methods*, 2021, 5, 2100193
- [25] Singh S B, Singh T I, Kim N H, et al. A core-shell MnO₂@Au nanofiber network as a high-performance flexible transparent supercapacitor electrode. *J Mater Chem A*, 2019, 7, 10672
- [26] Han Y, Chatti M, Ge Y, et al. Binder-free electrodes derived from interlayer-expanded MoS₂ nanosheets on carbon cloth with a 3D porous structure for lithium storage. *ChemElectroChem*, 2019, 6, 2338
- [27] Ardon M, Hayes P D, Hogarth G. Microwave-assisted reflux in organometallic chemistry: Synthesis and structural determination of molybdenum carbonyl complexes. an intermediate-level organometallic-inorganic experiment. *J Chem Educ*, 2002, 79, 1249
- [28] Vijay S K, Prabhu R K, Annie D, et al. Microwave-assisted preparation of precursor for the synthesis of nanocrystalline boron carbide powder. *Trans Indian Ceram Soc*, 2020, 79, 244
- [29] Zhao J, Gong J W, Zhou C L, et al. Utilizing human hair for solid-state flexible fiber-based asymmetric supercapacitors. *Appl Surf Sci*, 2020, 508, 145260
- [30] Hong X D, Fu J W, Liu Y, et al. Strawberry-like carbonized cotton Cloth@Polyaniline nanocomposite for high-performance symmetric supercapacitors. *Mater Chem Phys*, 2021, 258, 123999
- [31] Jeon H, Jeong J M, Hong S B, et al. Facile and fast microwave-assisted fabrication of activated and porous carbon cloth composites with graphene and MnO₂ for flexible asymmetric supercapacitors. *Electrochim Acta*, 2018, 280, 9
- [32] Tan J B, Thomas T, Liu J X, et al. Rapid microwave-assisted preparation of high-performance bifunctional Ni₃Fe/Co-N-C for rechargeable Zn-air battery. *Chem Eng J*, 2020, 395, 125151
- [33] Dirican M, Yildiz O, Lu Y, et al. Flexible binder-free silicon/silica/carbon nanofiber composites as anode for lithium-ion batteries. *Electrochim Acta*, 2015, 169, 52
- [34] Gomez De Arco L, Zhang Y, Schlenker C W, et al. Continuous, highly flexible, and transparent graphene films by chemical vapor deposition for organic photovoltaics. *ACS Nano*, 2010, 4, 2865
- [35] Dogru I B, Durukan M B, Turel O, et al. Flexible supercapacitor electrodes with vertically aligned carbon nanotubes grown on aluminum foils. *Prog Nat Sci: Mater Int*, 2016, 26, 232
- [36] Zhang Z J, Ren Z, Zhang S F, et al. High-yielding carbon nanofibers grown on NIPS-derived porous nickel as a flexible electrode for supercapacitors. *Mater Chem Front*, 2020, 4, 2976
- [37] Zang X N, Jiang Y Q, Sanghadasa M, et al. Chemical vapor deposition of 3D graphene/carbon nanotubes networks for hybrid supercapacitors. *Sens Actuators A*, 2020, 304, 111886
- [38] Gao H X, Hou F, Zheng X R, et al. Electrochemical property studies of carbon nanotube films fabricated by CVD method as anode materials for lithium-ion battery applications. *Vacuum*, 2015, 112, 1
- [39] Yang Z D, Yang X Y, Liu T, et al. *In situ* CVD derived co-N-C composite as highly efficient cathode for flexible Li-O₂ batteries. *Small*, 2018, 14, 1800590
- [40] Manjakkal L, Pullanchiyodan A, Yogeswaran N, et al. A wearable supercapacitor based on conductive PEDOT:PSS-coated cloth and a sweat electrolyte. *Adv Mater*, 2020, 32, 1907254
- [41] Ma F, Dai X Q, Jin J, et al. Hierarchical core-shell hollow CoMoS₄@Ni-Co-S nanotubes hybrid arrays as advanced electrode material for supercapacitors. *Electrochim Acta*, 2020, 331, 135459
- [42] Xie C, Shan H, Song X X, et al. Flexible S@C-CNTs cathodes with robust mechanical strength via blade-coating for lithium-sulfur batteries. *J Colloid Interface Sci*, 2021, 592, 448
- [43] Song J Y, Lee H H, Hong W, et al. A polysulfide-infiltrated carbon cloth cathode for high-performance flexible lithium-sulfur batteries. *Nanomaterials*, 2018, 8, 90
- [44] Kim D H, Lee Y H, Song Y B, et al. Thin and flexible solid electrolyte membranes with ultrahigh thermal stability derived from solution-processable Li argyrodites for all-solid-state Li-ion batteries. *ACS Energy Lett*, 2020, 5, 718
- [45] Yuan H, Wang G, Zhao Y X, et al. A stretchable, asymmetric, coaxial fiber-shaped supercapacitor for wearable electronics. *Nano Res*, 2020, 13, 1686
- [46] Kim S W, Yun J H, Son B, et al. Graphite/silicon hybrid electrodes using a 3D current collector for flexible batteries. *Adv Mater*, 2014, 26, 2977
- [47] Cheng M, Deivanayagam R, Shahbazian-Yassar R. 3D printing of

- electrochemical energy storage devices: A review of printing techniques and electrode/electrolyte architectures. *Batter Supercaps*, 2020, 3, 130
- [48] Krishnadoss V, Kanjilal B, Hesketh A, et al. *In situ* 3D printing of implantable energy storage devices. *Chem Eng J*, 2021, 409, 128213
- [49] Bao Y H, Liu Y, Kuang Y D, et al. 3D-printed highly deformable electrodes for flexible lithium ion batteries. *Energy Storage Mater*, 2020, 33, 55
- [50] Kong D, Wang Y, Huang S, et al. 3D printed compressible quasi-solid-state nickel-iron battery. *ACS Nano*, 2020, 14, 9675
- [51] Wang Z Q, Meng X Y, Chen K, et al. Development of high-capacity periodate battery with three-dimensional-printed casing accommodating replaceable flexible electrodes. *ACS Appl Mater Interfaces*, 2018, 10, 30257
- [52] Praveen S, Sim G S, Ho C W, et al. 3D-printed twisted yarn-type Li-ion battery towards smart fabrics. *Energy Storage Mater*, 2021, 41, 748
- [53] Lou Z, Li L, Wang L L, et al. Recent progress of self-powered sensing systems for wearable electronics. *Small*, 2017, 13, 1701791
- [54] Liu Y M, Wang L Y, Zhao L, et al. Recent progress on flexible nanogenerators toward self-powered systems. *InfoMat*, 2020, 2, 318
- [55] Hu Y X, Ding S S, Chen P, et al. Flexible solar-rechargeable energy system. *Energy Storage Mater*, 2020, 32, 356
- [56] Ostfeld A E, Gaikwad A M, Khan Y, et al. High-performance flexible energy storage and harvesting system for wearable electronics. *Sci Rep*, 2016, 6, 26122
- [57] Yang X Y, Feng X L, Jin X, et al. An illumination-assisted flexible self-powered energy system based on a Li-O₂ battery. *Angew Chem Int Ed*, 2019, 58, 16411
- [58] Zamarayeva A M, Ostfeld A E, Wang M, et al. Flexible and stretchable power sources for wearable electronics. *Sci Adv*, 2017, 3, e1602051
- [59] Hashemi S A, Ramakrishna S, Aberle A G. Recent progress in flexible-wearable solar cells for self-powered electronic devices. *Energy Environ Sci*, 2020, 13, 685
- [60] Lin Y J, Chen J Q, Tavakoli M M, et al. Printable fabrication of a fully integrated and self-powered sensor system on plastic substrates. *Adv Mater*, 2019, 31, 1804285
- [61] Dong P, Rodrigues M T F, Zhang J, et al. A flexible solar cell/supercapacitor integrated energy device. *Nano Energy*, 2017, 42, 181
- [62] Nozariasbmarz A, Collins H, Dsouza K, et al. Review of wearable thermoelectric energy harvesting: From body temperature to electronic systems. *Appl Energy*, 2020, 258, 114069
- [63] Liu Y Q, Zhang S, Zhou Y T, et al. Advanced wearable thermocells for body heat harvesting. *Adv Energy Mater*, 2020, 10, 2002539
- [64] Yang Y, Zhang H L, Zhu G, et al. Flexible hybrid energy cell for simultaneously harvesting thermal, mechanical, and solar energies. *ACS Nano*, 2013, 7, 785
- [65] Xia K Q, Tang H C, Fu J M, et al. A high strength triboelectric nanogenerator based on rigid-flexible coupling design for energy storage system. *Nano Energy*, 2020, 67, 104259
- [66] Jiang Q, Wu C S, Wang Z J, et al. MXene electrochemical microsupercapacitor integrated with triboelectric nanogenerator as a wearable self-charging power unit. *Nano Energy*, 2018, 45, 266
- [67] Yi F, Wang J, Wang X, et al. Stretchable and waterproof self-charging power system for harvesting energy from diverse deformation and powering wearable electronics. *ACS Nano*, 2016, 10, 6519
- [68] Maitra A, Paria S, Karan S K, et al. Triboelectric nanogenerator driven self-charging and self-healing flexible asymmetric supercapacitor power cell for direct power generation. *ACS Appl Mater Interfaces*, 2019, 11, 5022
- [69] Pu X, Li L X, Liu M M, et al. Wearable self-charging power textile based on flexible yarn supercapacitors and fabric nanogenerators. *Adv Mater*, 2016, 28, 98
- [70] Chun S, Son W, Lee G, et al. Single-layer graphene-based transparent and flexible multifunctional electronics for self-charging power and touch-sensing systems. *ACS Appl Mater Interfaces*, 2019, 11, 9301
- [71] Vyas A, Li Q, Eeckhoudt R V D, et al. Towards integrated flexible energy harvester and supercapacitor for self-powered wearable sensors. 2019 19th International Conference on Micro and Nanotechnology for Power Generation and Energy Conversion Applications (PowerMEMS), 2019, 1
- [72] Gilshteyn E P, Amanbaev D, Silibin M V, et al. Flexible self-powered piezo-supercapacitor system for wearable electronics. *Nanotechnology*, 2018, 29, 325501
- [73] He H X, Fu Y M, Zhao T M, et al. All-solid-state flexible self-charging power cell basing on piezo-electrolyte for harvesting/storing body-motion energy and powering wearable electronics. *Nano Energy*, 2017, 39, 590
- [74] Zou Y, Liao J W, Ouyang H, et al. A flexible self-arched biosensor based on combination of piezoelectric and triboelectric effects. *Appl Mater Today*, 2020, 20, 100699
- [75] Cheng C, Li X, Xu G, et al. Battery-free, wireless, and flexible electrochemical patch for *in situ* analysis of sweat cortisol via near field communication. *Biosens Bioelectron*, 2021, 172, 112782
- [76] Zhang W, Guan H Y, Zhong T Y, et al. Wearable battery-free perspiration analyzing sites based on sweat flowing on ZnO nanoarrays. *Nano Micro Lett*, 2020, 12, 1
- [77] Mazzaracchio V, Fiore L, Nappi S, et al. Medium-distance affordable, flexible and wireless epidermal sensor for pH monitoring in sweat. *Talanta*, 2021, 222, 121502
- [78] Lim H R, Lee Y, Jones K A, et al. All-in-one, wireless, fully flexible sodium sensor system with integrated Au/CNT/Au nanocomposites. *Sens Actuators B*, 2021, 331, 129416
- [79] Manjakkal L, Núñez C G, Dang W T, et al. Flexible self-charging supercapacitor based on graphene-Ag-3D graphene foam electrodes. *Nano Energy*, 2018, 51, 604
- [80] Cai G, Hao B, Luo L, et al. Highly stretchable sheath-core yarns for multifunctional wearable electronics. *ACS Appl Mater Interfaces*, 2020, 12, 29717
- [81] Wang Q F, Ran X, Shao W K, et al. High performance flexible supercapacitor based on metal-organic-framework derived CoSe₂ nanosheets on carbon nanotube film. *J Power Sources*, 2021, 490, 229517
- [82] Sun T R, Shen L X, Jiang Y, et al. Wearable textile supercapacitors for self-powered enzyme-free smart sensors. *ACS Appl Mater Interfaces*, 2020, 12, 21779
- [83] Wu T, Wu X J, Li L H, et al. Anisotropic boron-carbon heteronanosheets for ultrahigh energy density supercapacitors. *Angew Chem Int Ed*, 2020, 59, 23800
- [84] Wang L, Zhang Y, Pan J, et al. Stretchable lithium-air batteries for wearable electronics. *J Mater Chem A*, 2016, 4, 13419
- [85] Sun H Y, Pan N, Jin X, et al. Active-powering pressure-sensing fabric devices. *J Mater Chem A*, 2020, 8, 358
- [86] Wang Z F, Mo F N, Ma L T, et al. Highly compressible cross-linked polyacrylamide hydrogel-enabled compressible Zn-MnO₂ battery and a flexible battery-sensor system. *ACS Appl Mater Interfaces*, 2018, 10, 44527
- [87] Liao M, Wang J W, Ye L, et al. A high-capacity aqueous zinc-ion battery fiber with air-recharging capability. *J Mater Chem A*, 2021, 9, 6811
- [88] Song Y, Min J H, Yu Y, et al. Wireless battery-free wearable sweat sensor powered by human motion. *Sci Adv*, 2020, 6, eaay9842
- [89] Han W X, He H X, Zhang L L, et al. A self-powered wearable noninvasive electronic-skin for perspiration analysis based on piezo-bi-

- osensing unit matrix of enzyme/ZnO nanoarrays. *ACS Appl Mater Interfaces*, 2017, 9, 29526
- [90] Peng Z, Jia D S, Tang J, et al. CoNiO₂/TiN–TiO_xN_y composites for ultrahigh electrochemical energy storage and simultaneous glucose sensing. *J Mater Chem A*, 2014, 2, 10904
- [91] Ngo Y L T, Chung J S, Hur S H. Multi-functional NiO/g-C₃N₄ hybrid nanostructures for energy storage and sensor applications. *Korean J Chem Eng*, 2020, 37, 1589
- [92] Zhao J, Lin Y, Wu J, et al. A fully integrated and self-powered smartwatch for continuous sweat glucose monitoring. *ACS Sens*, 2019, 4, 1925
- [93] Punetha D, Kar M, Pandey S K. A new type low-cost, flexible and wearable tertiary nanocomposite sensor for room temperature hydrogen gas sensing. *Sci Rep*, 2020, 10, 2151
- [94] Wu J, Wu Z X, Ding H J, et al. flexible, 3D SnS₂/reduced graphene oxide heterostructured NO₂ sensor. *Sens Actuators B*, 2020, 305, 127445
- [95] Lee S H, Eom W, Shin H, et al. Room-temperature, highly durable Ti₃C₂T_x MXene/graphene hybrid fibers for NH₃ gas sensing. *ACS Appl Mater Interfaces*, 2020, 12, 10434
- [96] Yuan S Y, Zhang S L. Recent progress on gas sensors based on graphene-like 2D/2D nanocomposites. *J Semicond*, 2019, 40, 111608
- [97] Benedict S, Nagarajan A, Thejas K, et al. Heterogenous integration of MEMS gas sensor using FOWLP: Personal environment monitors. 2020 IEEE 70th Electronic Components and Technology Conference (ECTC), 2020, 824
- [98] Wang Y, Huang J. Recent advancements in flexible humidity sensors. *J Semicond*, 2020, 41, 040401
- [99] Zhang D Z, Wang M Y, Zhang W Y, et al. Flexible humidity sensing and portable applications based on MoSe₂ nanoflowers/copper tungstate nanoparticles. *Sens Actuators B*, 2020, 304, 127234
- [100] Zhuang Z, Li Y F, Li X F, et al. A novel polymer-salt complex based on LiCl doped SPEEK/poly(ether ether ketone)-copoly(ethylene glycol) for humidity sensors. *IEEE Sens J*, 2021, 21, 8886
- [101] Meng X Y, Yang J H, Liu Z G, et al. Non-contact, fibrous cellulose acetate/aluminum flexible electronic-sensor for humidity detecting. *Compos Commun*, 2020, 20, 100347
- [102] Tulliani J M, Inserra B, Ziegler D. Carbon-based materials for humidity sensing: A short review. *Micromachines*, 2019, 10, 232
- [103] Pereira N, Correia V, Peřinka N, et al. All-printed smart label with integrated humidity sensors and power supply. *Adv Eng Mater*, 2021, 23, 2001229
- [104] Costa R S, Guedes A, Pereira A M, et al. Fabrication of all-solid-state textile supercapacitors based on industrial-grade multi-walled carbon nanotubes for enhanced energy storage. *J Mater Sci*, 2020, 55, 10121
- [105] Liang X, Long G H, Fu C W, et al. High performance all-solid-state flexible supercapacitor for wearable storage device application. *Chem Eng J*, 2018, 345, 186
- [106] Rajendran V, Mohan A M V, Jayaraman M, et al. All-printed, interdigitated, freestanding serpentine interconnects based flexible solid state supercapacitor for self powered wearable electronics. *Nano Energy*, 2019, 65, 104055
- [107] Yu L H, Yi Y Y, Yao T, et al. All VN-graphene architecture derived self-powered wearable sensors for ultrasensitive health monitoring. *Nano Res*, 2019, 12, 331
- [108] Li H F, Han C P, Huang Y, et al. An extremely safe and wearable solid-state zinc ion battery based on a hierarchical structured polymer electrolyte. *Energy Environ Sci*, 2018, 11, 941
- [109] Du X, Tian M, Sun G, et al. Self-powered and self-sensing energy textile system for flexible wearable applications. *ACS Appl Mater Interfaces*, 2020, 12, 55876
- [110] Xiong C Y, Li M R, Zhao W, et al. A smart paper@polyaniline nanofibers incorporated vitrimer bifunctional device with reshaping, shape-memory and self-healing properties applied in high-performance supercapacitors and sensors. *Chem Eng J*, 2020, 396, 125318
- [111] Huang J R, Peng S J, Gu J F, et al. Correction: Self-powered integrated system of a strain sensor and flexible all-solid-state supercapacitor by using a high performance ionic organohydrogel. *Mater Horiz*, 2020, 7, 2768
- [112] Ge G, Huang W, Shao J J, et al. Recent progress of flexible and wearable strain sensors for human-motion monitoring. *J Semicond*, 2018, 39, 011012
- [113] Shit A, Heo S B, In I, et al. Mineralized soft and elastic polymer dot hydrogel for a flexible self-powered electronic skin sensor. *ACS Appl Mater Interfaces*, 2020, 12, 34105
- [114] Li Z M, Dall'Agnese Y, Guo J, et al. Flexible freestanding all-MXene hybrid films with enhanced capacitive performance for powering a flex sensor. *J Mater Chem A*, 2020, 8, 16649
- [115] Wang X, Wang S, Yang Y, et al. Hybridized electromagnetic-triboelectric nanogenerator for scavenging air-flow energy to sustainably power temperature sensors. *ACS Nano*, 2015, 9, 4553
- [116] Kim H, Kim S, Lee M, et al. Smart patch for skin temperature: Preliminary study to evaluate psychometrics and feasibility. *Sensors*, 2021, 21, 1855
- [117] Seema R, Mandal S, Singh P, et al. Fiber Bragg grating sensors for *in situ* temperature measurement on bending a flexible planar supercapacitor. *Sens Actuators A*, 2020, 314, 112266
- [118] Sun H X, Tian W, Cao F R, et al. Ultrahigh-performance self-powered flexible double-twisted fibrous broadband perovskite photodetector. *Adv Mater*, 2018, 30, 1706986
- [119] Wang Z P, Cheng J L, Huang H, et al. Flexible self-powered fiber-shaped photocapacitors with ultralong cyclife and total energy efficiency of 5.1%. *Energy Storage Mater*, 2020, 24, 255
- [120] Tao J Y, Xiao Z J, Wang J F, et al. A self-powered, flexible photodetector based on perovskite nanowires with Ni-Al electrodes. *J Alloys Compd*, 2020, 845, 155311
- [121] Yildirim M A, Teker K. Self-powered fine-pattern flexible SiC single nanowire ultraviolet photodetector. *J Alloys Compd*, 2021, 868, 159255
- [122] Zong L, Li X K, Zhu L T, et al. Photo-responsive heterojunction nanosheets of reduced graphene oxide for photo-detective flexible energy devices. *J Mater Chem A*, 2019, 7, 7736
- [123] Bhandodkar A J, Lee S P, Huang I, et al. Sweat-activated biocompatible batteries for epidermal electronic and microfluidic systems. *Nat Electron*, 2020, 3, 554
- [124] Wu X Y, Feng J Y, Deng J, et al. Fiber-shaped organic electrochemical transistors for biochemical detections with high sensitivity and stability. *Sci China Chem*, 2020, 63, 1281
- [125] Wei J, Teng Y C, Meng T T, et al. A multicomponent interconnected composite paper for triple-mode sensors and flexible micro-supercapacitors. *J Mater Chem A*, 2020, 8, 24620
- [126] Park H, Kim J W, Hong S Y, et al. Microporous polypyrrole-coated graphene foam for high-performance multifunctional sensors and flexible supercapacitors. *Adv Funct Mater*, 2018, 28, 1707013



Xiaohao Ma received his B.E. degree from Southern University of Science and Technology in 2018. He is currently a PhD student in the joint program of Southern University of Science and Technology and Hong Kong Polytechnic University. His research focuses on textile-based sensors.



Zhengfan Jiang was admitted by Southern University of Science and Technology in 2018 and is currently a senior student at the School of Microelectronics. His research interests focus on flexible electronics and electrochemical devices.



Yuanjing Lin received her Ph.D degree in Electronic and Computer Science, Hong Kong University of Science and Technology in 2018. From 2019 to 2020, she was a Postdoctoral Fellow in Electrical Engineering and Computer Sciences at the University of California, Berkeley. She is currently an Assistant Professor at the Southern University of Science and Technology. Her research interests focus on flexible electronics and wearable sensing systems.